


UNIVERSAL PIPE COUPLINGS


VOGI universal pipe couplings are designed to join pipes made from different materials and of different size. Can be used in sewers as well as in other pipe works for example in ventilation.

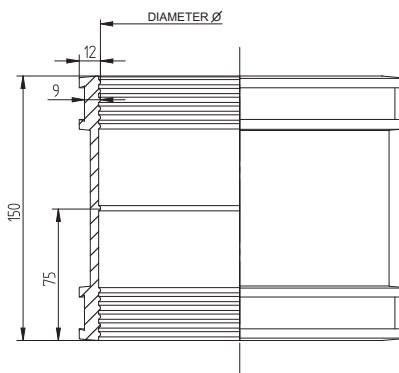

- Inteded use of EVO couplings:
- pipe diameter difference is over 10mm
 - underground applications
 - pressure applications
 - to join pipe of different material
 - to join plain ended pipes
 - to repair damaged sections

EVO

| INDEX | DIAMETER Ø | INDEX | DIAMETER Ø | INDEX | DIAMETER Ø |
|--------|--------------|--------|--------------|--------|--------------|
| EVO115 | 100 – 115 mm | EVO265 | 240 – 265 mm | EVO445 | 420 – 445 mm |
| EVO125 | 110 – 125 mm | EVO275 | 250 – 275 mm | EVO465 | 435 – 465 mm |
| EVO137 | 120 – 137 mm | EVO290 | 265 – 290 mm | EVO490 | 465 – 490 mm |
| EVO150 | 125 – 150 mm | EVO310 | 285 – 310 mm | EVO510 | 480 – 510 mm |
| EVO165 | 140 – 165 mm | EVO320 | 295 – 320 mm | EVO525 | 495 – 525 mm |
| EVO175 | 150 – 175 mm | EVO335 | 305 – 335 mm | EVO540 | 510 – 540 mm |
| EVO185 | 160 – 185 mm | EVO345 | 315 – 345 mm | EVO550 | 520 – 550 mm |
| EVO195 | 180 – 195 mm | EVO360 | 340 – 360 mm | EVO560 | 530 – 560 mm |
| EVO200 | 175 – 200 mm | EVO385 | 355 – 385 mm | EVO570 | 540 – 570 mm |
| EVO215 | 190 – 215 mm | EVO410 | 385 – 410 mm | EVO580 | 555 – 580 mm |
| EVO225 | 200 – 225 mm | EVO425 | 400 – 425 mm | EVO600 | 570 – 600 mm |
| EVO250 | 225 – 250 mm | EVO430 | 405 – 430 mm | EVO620 | 590 – 620 mm |



* upon request could be made from NBR or SBR rubber
 ** upon request could be made from AISI316 stainless steel

Inteded use of STANDARD couplings:

- pipe diameter difference is less than 10mm
- applications with easy access
- no pressure applications
- to join pipe of different materials
- to join plain ended pipes
- to repair damaged sections


 7 Nm 100-200 mm
 13 Nm 201-400 mm
 16 Nm 401-600 mm


 0,5 BAR

EN 681-1
EN 1277

EPDM*
+
AISI304**


 CE



STANDARD

| MODEL | DIAMETER Ø | MODEL | DIAMETER Ø |
|-------|--------------|-------|--------------|
| ST115 | 100 – 115 mm | ST195 | 180 – 195 mm |
| ST125 | 110 – 125 mm | ST200 | 175 – 200 mm |
| ST137 | 120 – 137 mm | ST215 | 190 – 215 mm |
| ST150 | 125 – 150 mm | ST225 | 200 – 225 mm |
| ST165 | 140 – 165 mm | ST250 | 225 – 250 mm |
| ST175 | 150 – 175 mm | ST265 | 240 – 265 mm |
| ST185 | 170 – 185 mm | ST275 | 250 – 275 mm |

Dimensions of rubber ring are the same like in EVO series.

SAMPLE USE OF EVO175

